

---


# TOP ONE TECH LIMITED

## 23.8" LCD Open Frame PCAP Multi-Touch Monitor

(PCAP and Zero-bezel Type)

**Model: TOT238UCA001**

**Part number:TOT238K1C013**

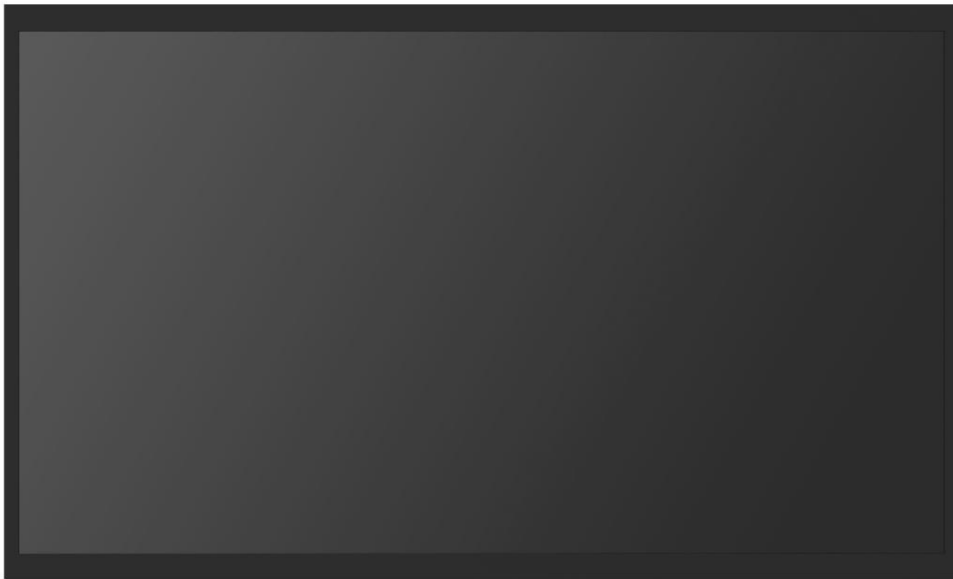

Top One Tech's 23.8" open frame LCD touch monitors have a long-lasting product cycle because the enclosure is controlled by Top One Tech's specifications. The TOT238UCA001 integrate with the Top One Tech's PCAP technology touchscreen.

## Features

- Bezel seal standard: Zero-bezel, True flat
- Long lasting product cycle-enclosure controlled by Top One Tech specifications
- Future generation panels phased-in without external changes
- High quality panel with high brightness, high contrast ratio and broad viewing angle
- Multiple mounting options including VESA mount, horizontal or vertical bracket-mount
- Compact and slim profile for easy integration from side, top and bottom
- Top One Tech's PCAP technology on AG glass for the ultimate in image quality
- Finger or gloved hand operation
- USB touch interface port
- VGA/DVI input video format
- Worldwide agency approvals


## Specification

<b>Model No.</b>	TOT215UCA001	
<b>Touch screen Type</b>	Projected Capacitive touch sensor, 10 points in win7	
<b>Diagonal Size</b>	23.8" diagonal	
<b>Aspect Ratio</b>	16:9	
<b>Dimensions</b>	545.6*328*49.5(mm)	
<b>Active Display Area</b>	528*297.5(mm)	
<b>Suggested Resolution</b>	1920×1080@60Hz	
<b>LCD Technology</b>	Active matrix TFT LCD with LED back lighting	
<b>Support Colors</b>	16.7M	
<b>Brightness(Typ.)</b>	LCD Panel: 250 nits ; With PCAP:215 nits	
<b>Response Time(Typ.)</b>	5ms	
<b>Viewing Angle (Typ.at CR&gt; 10)</b>	Horizontal(left/right)	89°/89°
	Vertical(up/down)	89°/89°
<b>Contrast Ratio(Typ.)</b>	3000:1	
<b>Video Input</b>	VGA ,DVI	
<b>Power Supply</b>	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz	

<b>Environment</b>	Operating Temp.	0~50°C
	Storage Temp.	-10~60°C
	Operating RH:	20%~80%
	Storage RH:	10%~90%
<b>MTBF</b>	30,000 Hours demonstrated	
<b>Mount Options:</b>	VESA 4-hole 100mm/75mm mounting interface on rear of unit 2-hole mounting interface on all 4 sides	
<b>OSD Control</b>	Buttons	AUTO,+,POWER,-,MENU
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
<b>Agency Approval</b>	CCC,ETL,FCC,CE,RoHS	
<b>Regular Warranty</b>	1 year	

**NOTE:**The display SPEC. will change follow the relevant LCD panel brand and model

## Mechanical Dimensions

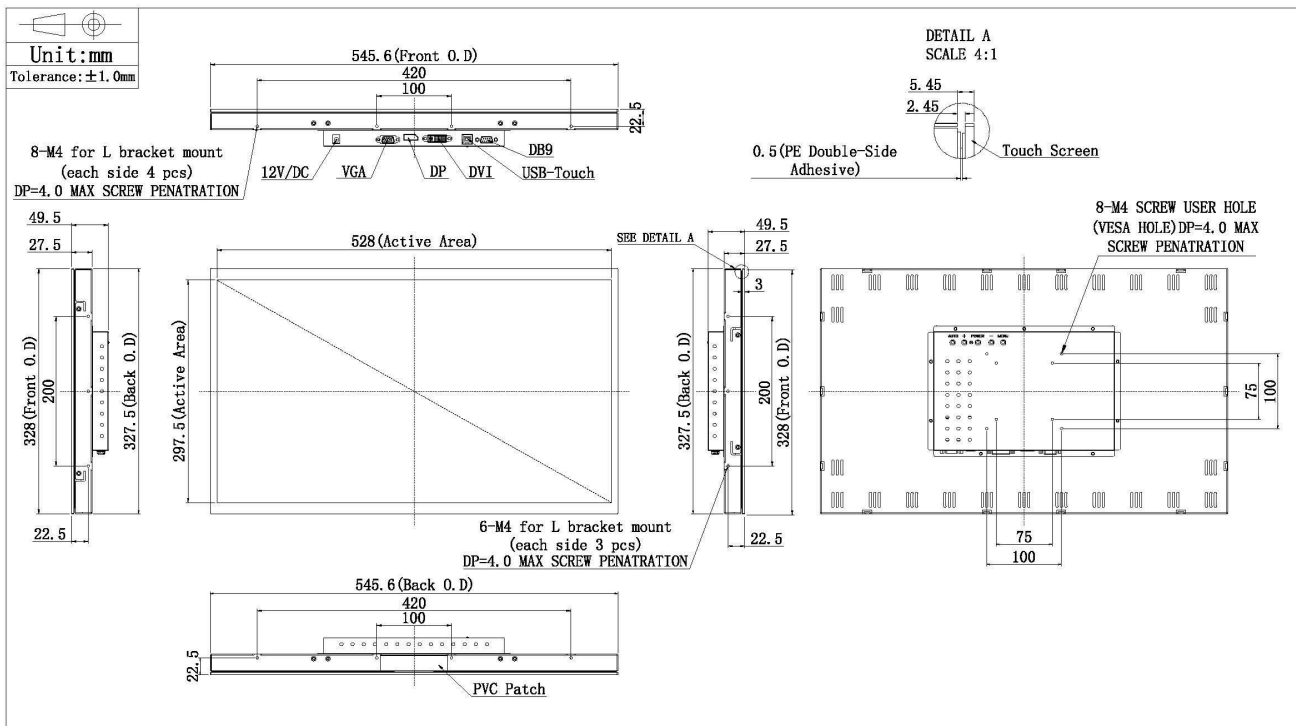

## Accessories

Power Cable: A North American power cable or an European power cable is included according to the end user's area(optional by different size).

Power Supply Brick:A power supply brick is included(optional by different size).

Touch/Video/DVI Cables: Detachable serial or USB touch cable , video cable and DVI cable are included(optional by different size).

L-brackets: Four standard L-brackets are included(optional by different size).

## Typical Application

Information Kiosk

Banking ATM

Casino Gaming machine

Industrial Control

Transportation

Education and Training

## How to contact us

TOP ONE TECH LIMITED

Mobile Phone : (+86)13631610695

Tel: 0086-0755-21070641

Whatsapp/Wechat :+8613631610695

Email : sales@toponetech.cn

Skype : elsieyu-sz@hotmail.com

Office in China : Room 1517, Taiyangneng Guigu Building Zhongxing Xiaoqu,Yunfeng Road No.3  
Gaofeng shequ, Longhua District, Shenzhen, China

Facilities in China : No. 2,Guihua Jiayi Industrial district,Guanlan, Longhua,Shenzhen, China 518109