



Front

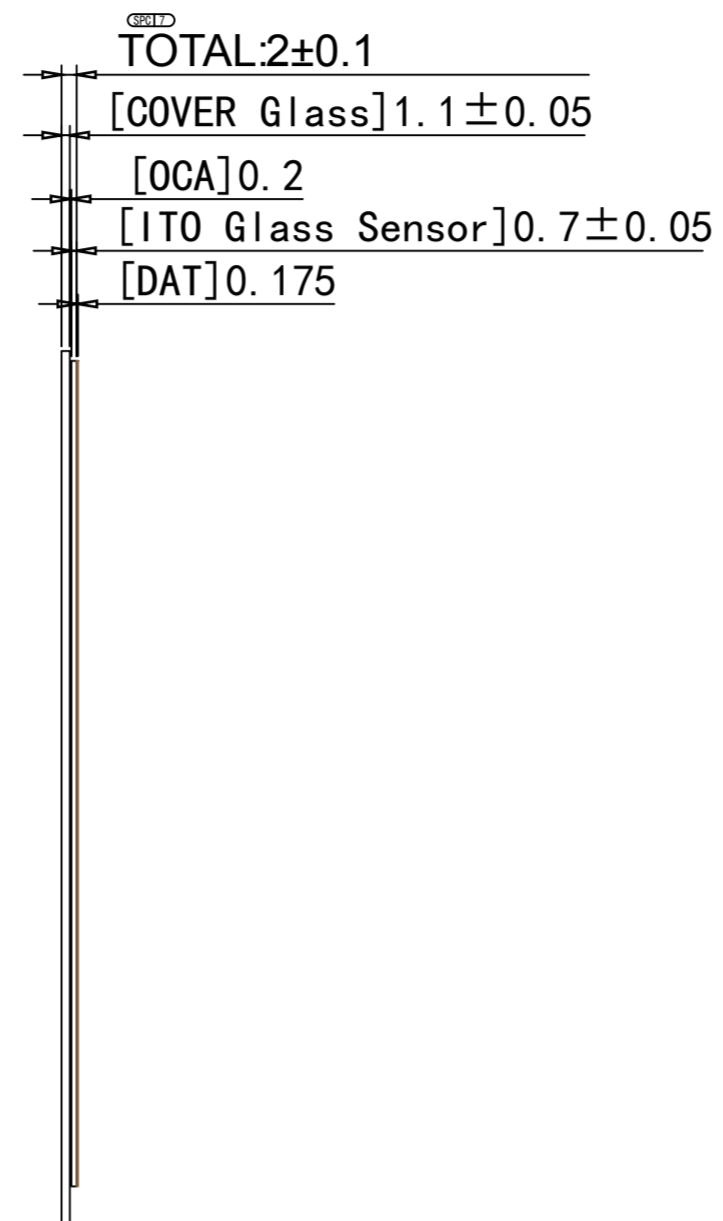


Side

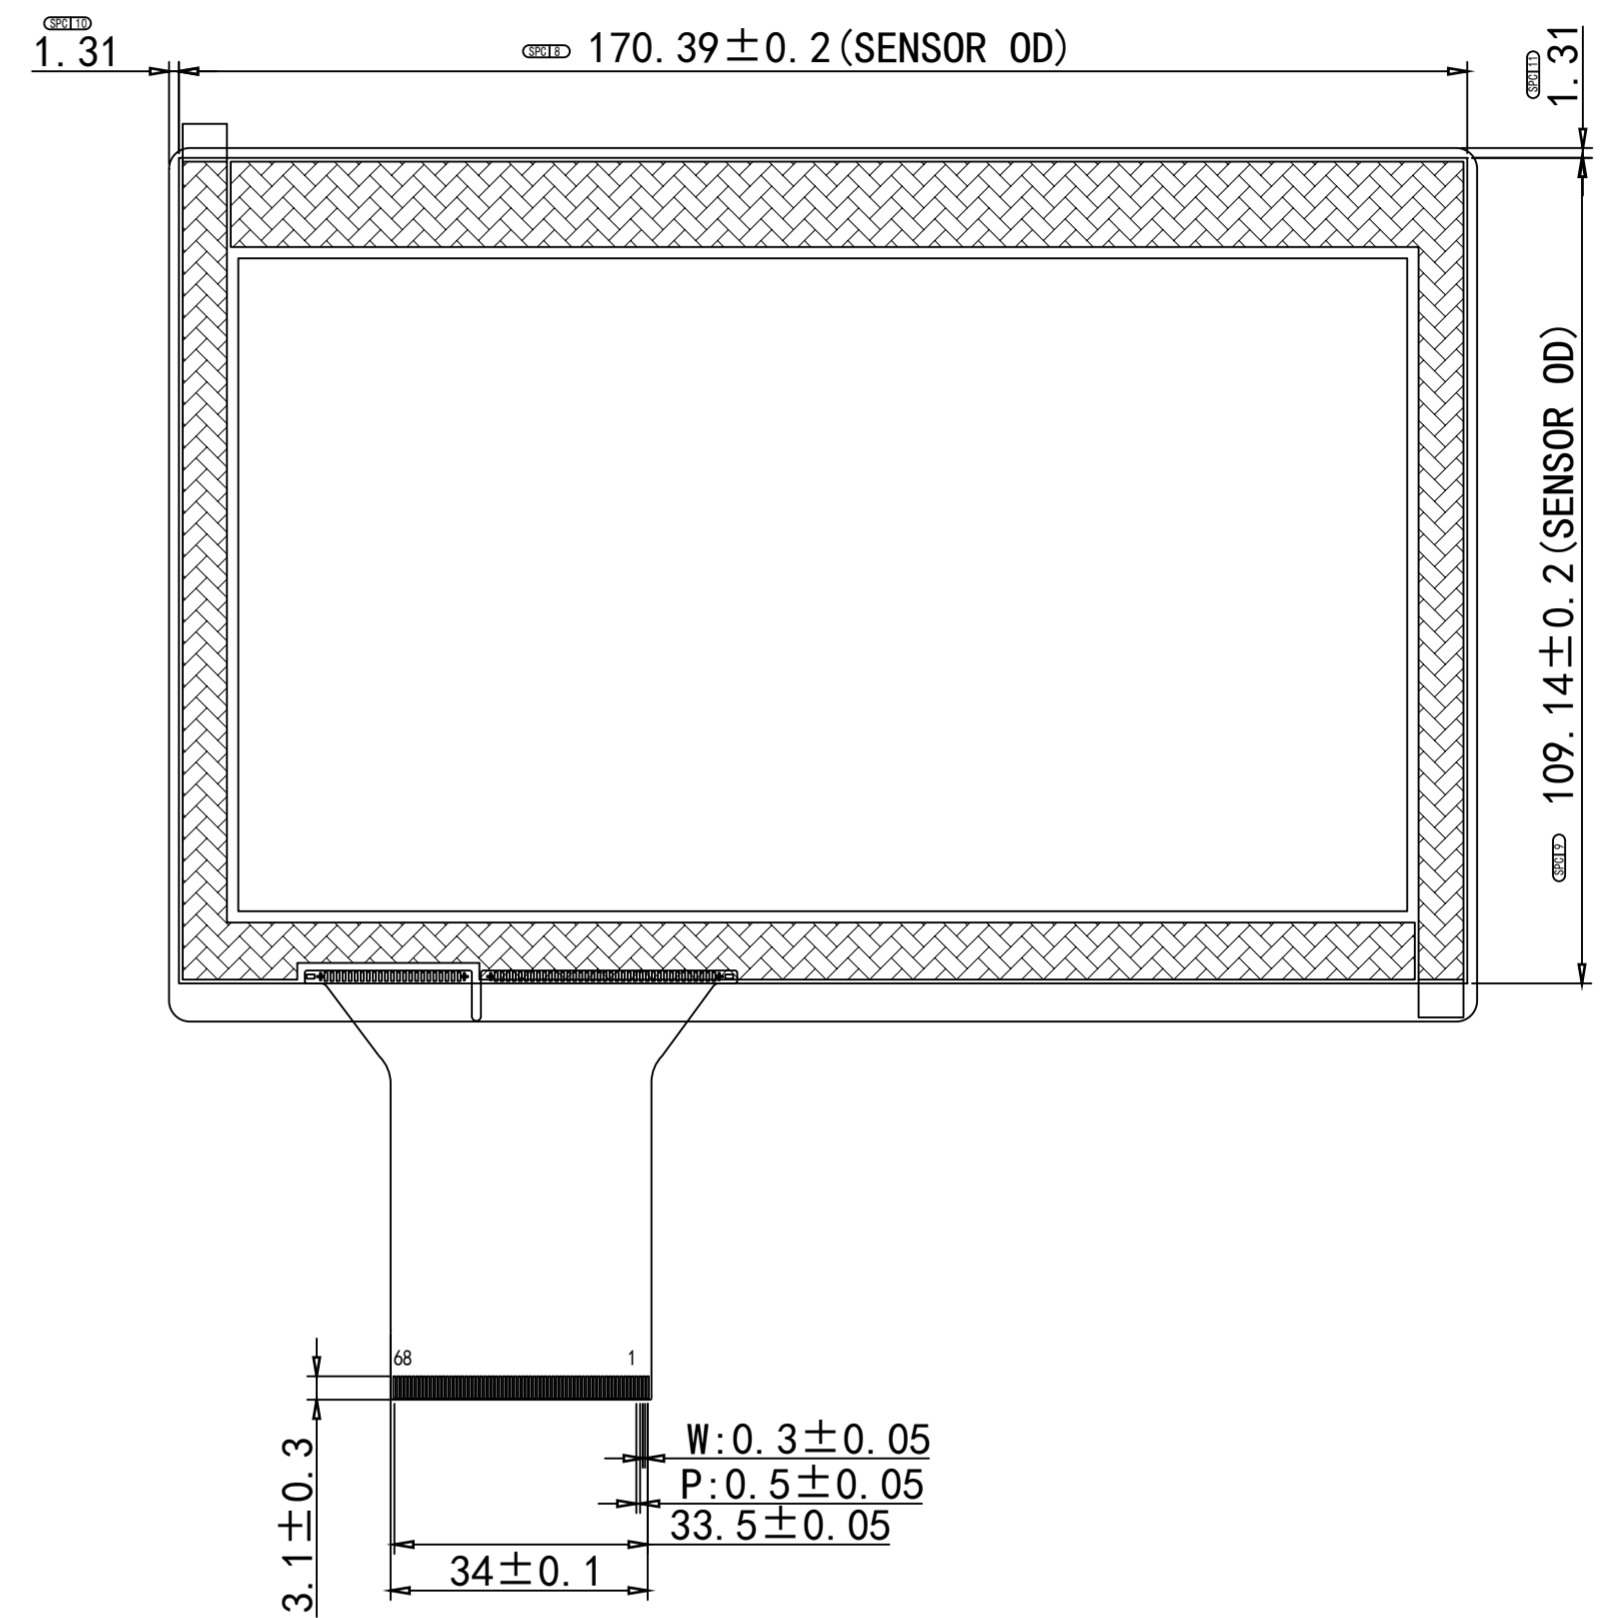

Back

Technical paramelters

- Cover Glass+Loca+ITO Glass+FPC  
ITO Glass:T= $0.7 \pm 0.05$ mm  
Cover Glass:T= $1.1 \pm 0.05$ mm  
SCA= $0.2$ mm  
Controller:ILI2511 Interface:USB+IIC
- Surface hardness: $\geq 6H$
- Transmittance: $\geq 85\%$
- Operation voltage:5V
- Operation temperature: $-20^{\circ}C \sim +70^{\circ}C$ ,  $\leq 85\%RH$
- Storage temperature: $-30^{\circ}C \sim +80^{\circ}C$ ,  $\leq 85\%RH$
- ROHS must be complied
- Unspecification tolerance are  $\pm 0.2$ mm

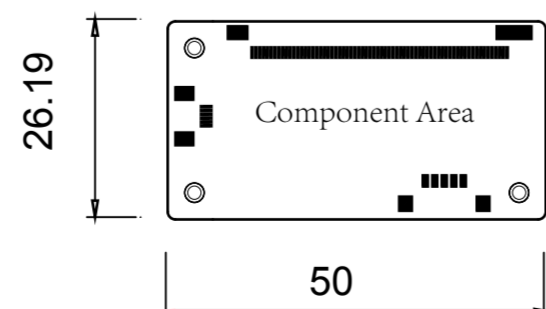

USB IFS	
PIN	DFNI
1	VDD/5V
2	D-
3	D+
4	GND

<b>TOP ONE TECH LIMITED</b>		VIEW:
DRAWN BY:	Model: TOT070UCA009	
CHECKED BY:	Part No: TTS070L1C001	
APPROVED BY:	VERSION NUMBER: A	UNITS mm
Standard tolerance:	DATE: 05/25/2018	SCALE 1 : 1