




Front

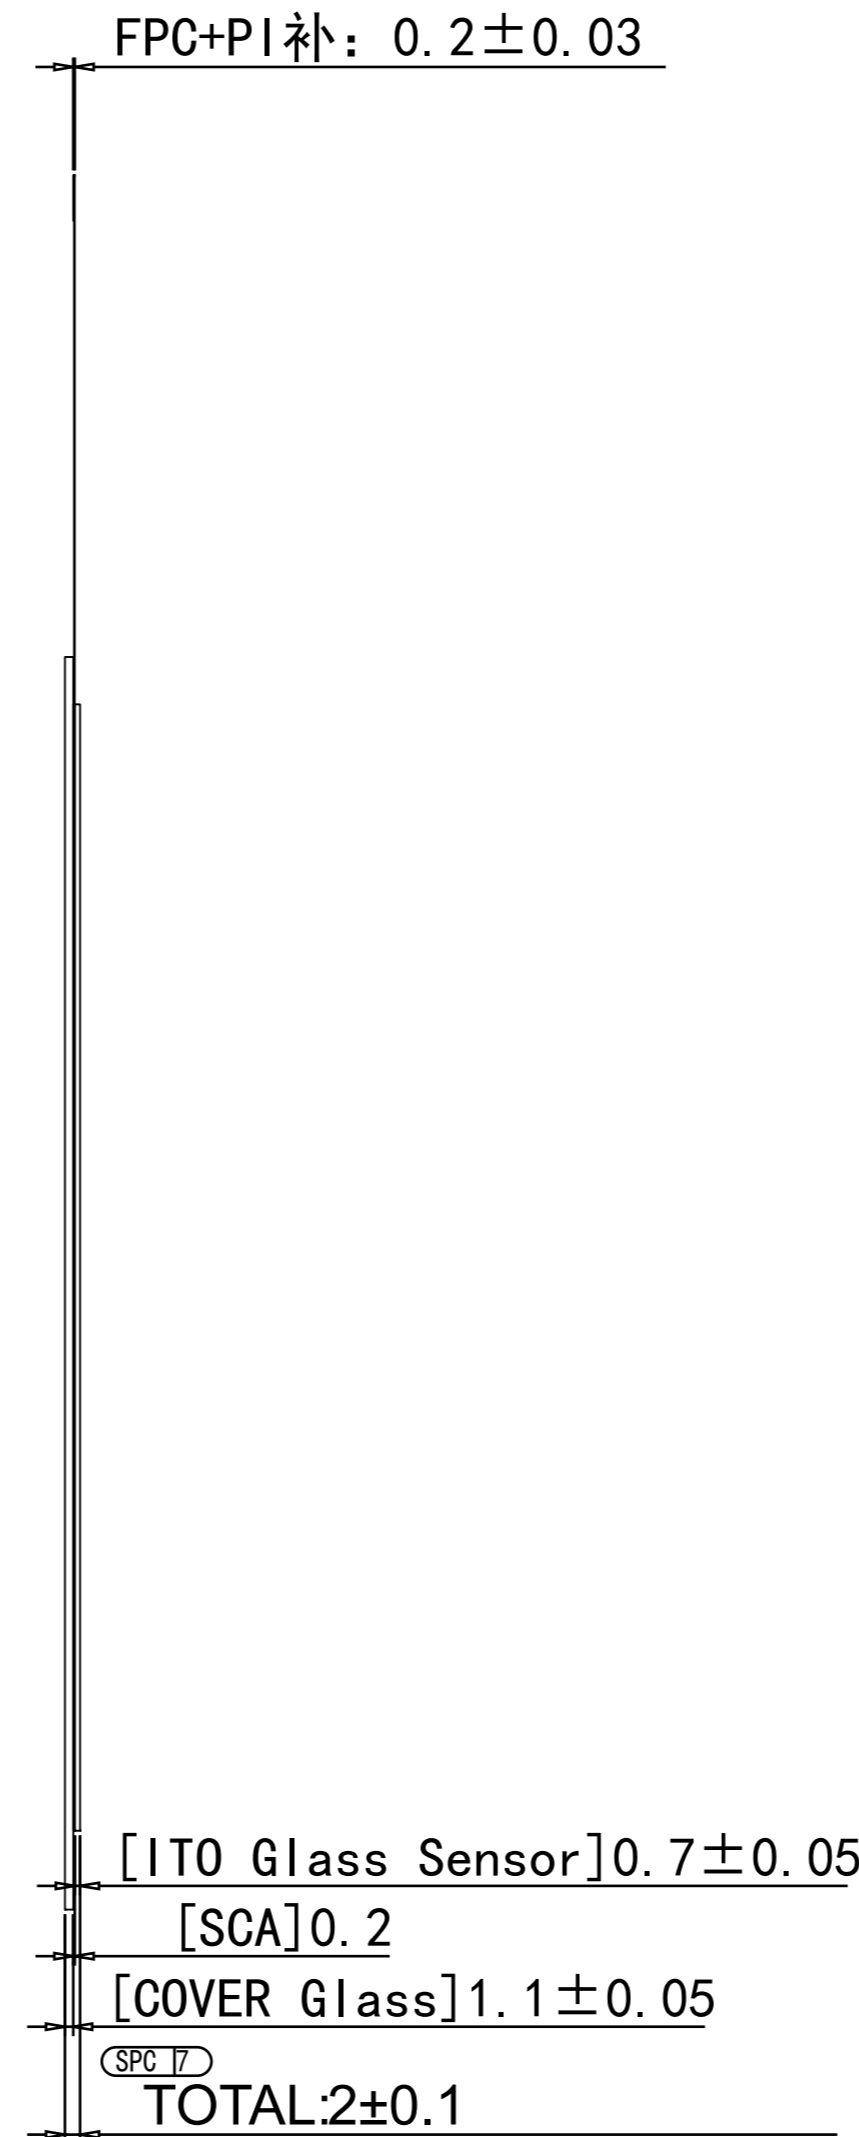

Side

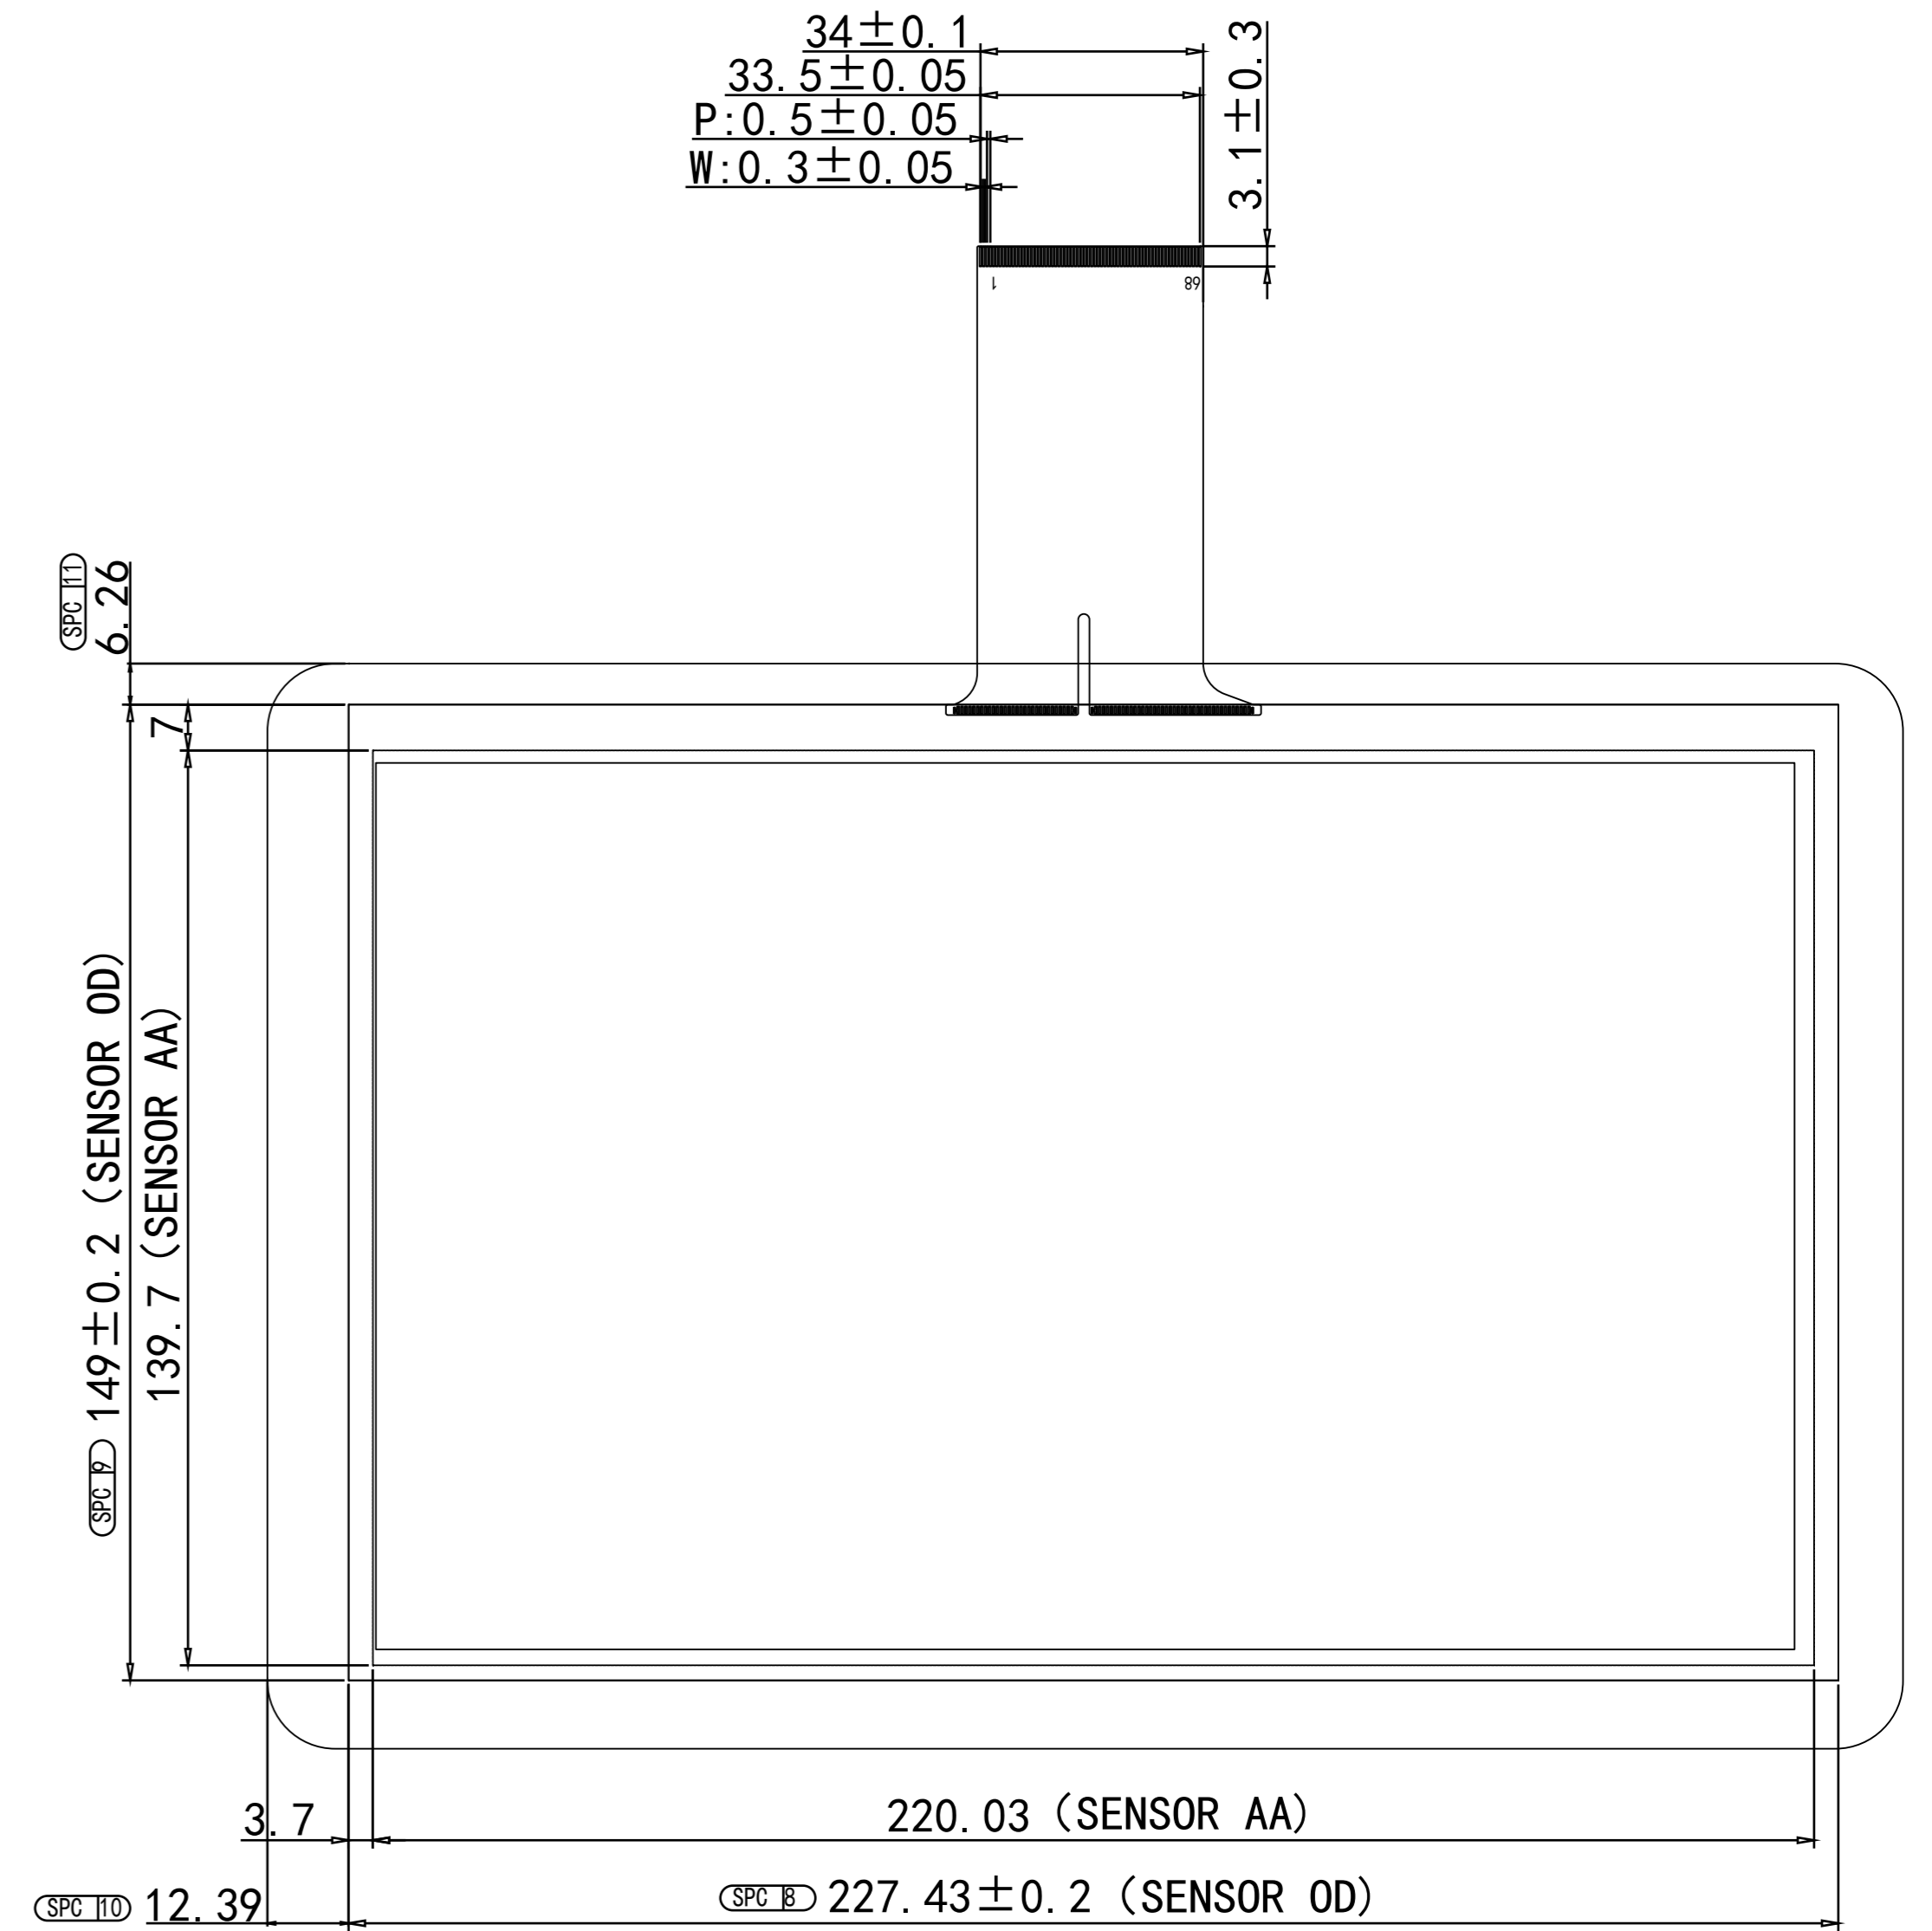

Back

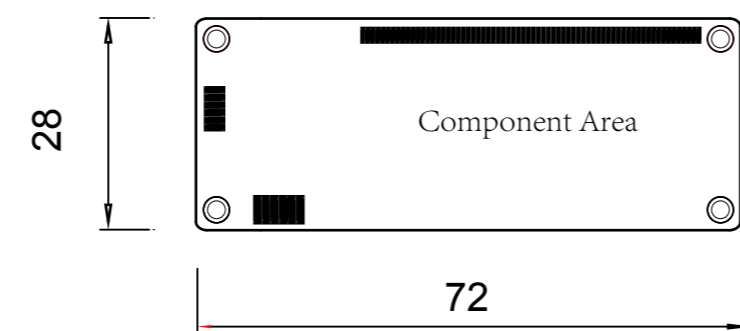

| USB IFS | |
|---------|--------|
| PIN | DFNI |
| 1 | VDD/5V |
| 2 | D- |
| 3 | D+ |
| 4 | GND |

| Touch TopOneTech [®] | | TOP ONE TECH LIMITED | |
|--------------------------------------|--------------------------|----------------------|----------------|
| DRAWN BY: Wei | Model: TOT101UCA009 | VIEW: | |
| CHECKED BY: Wei | Part No: TTS101L1C001 | | |
| APPROVED BY: Chen | VERSION NUMBER: A | UNITS mm | SCALE 1 : 1 |
| Standard tolerance: | DATE: 05/25/2018 | | |

Technical parameters

- Cover Glass+Loca+ITO Glass+FPC
ITO Glass:T= 0.7 ± 0.05 mm
Cover Glass:T= 1.1 ± 0.05 mm
SCA= 0.2 mm
Controller:ILI2511 Interface:USB+IIC
- Surface hardness: $\geq 6H$
- Transmittance: $\geq 85\%$
- Operation voltage:3.3V
- Operation temperature: $-20^{\circ}C \sim +70^{\circ}C$, $\leq 85\%RH$
- Storage temperature: $-30^{\circ}C \sim +80^{\circ}C$, $\leq 85\%RH$
- ROHS must be complied
- Unspecification tolerance are ± 0.2 mm