
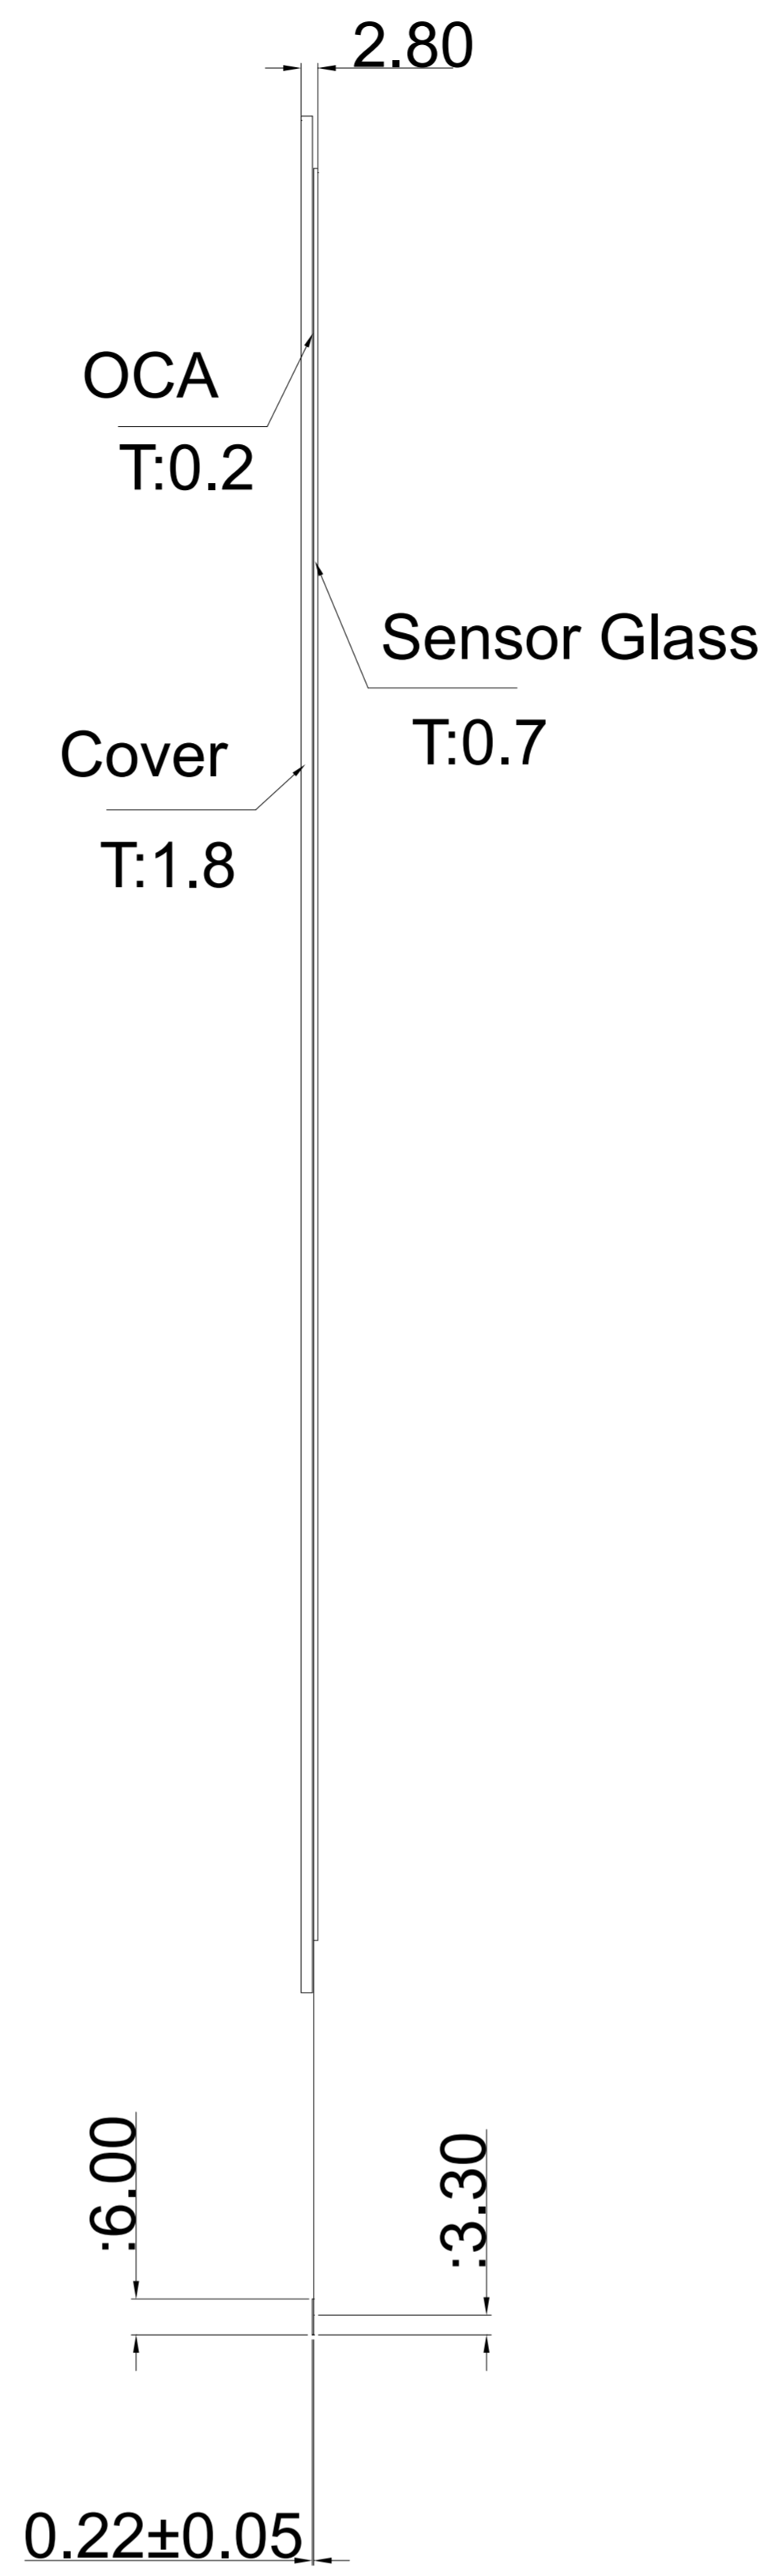


Front

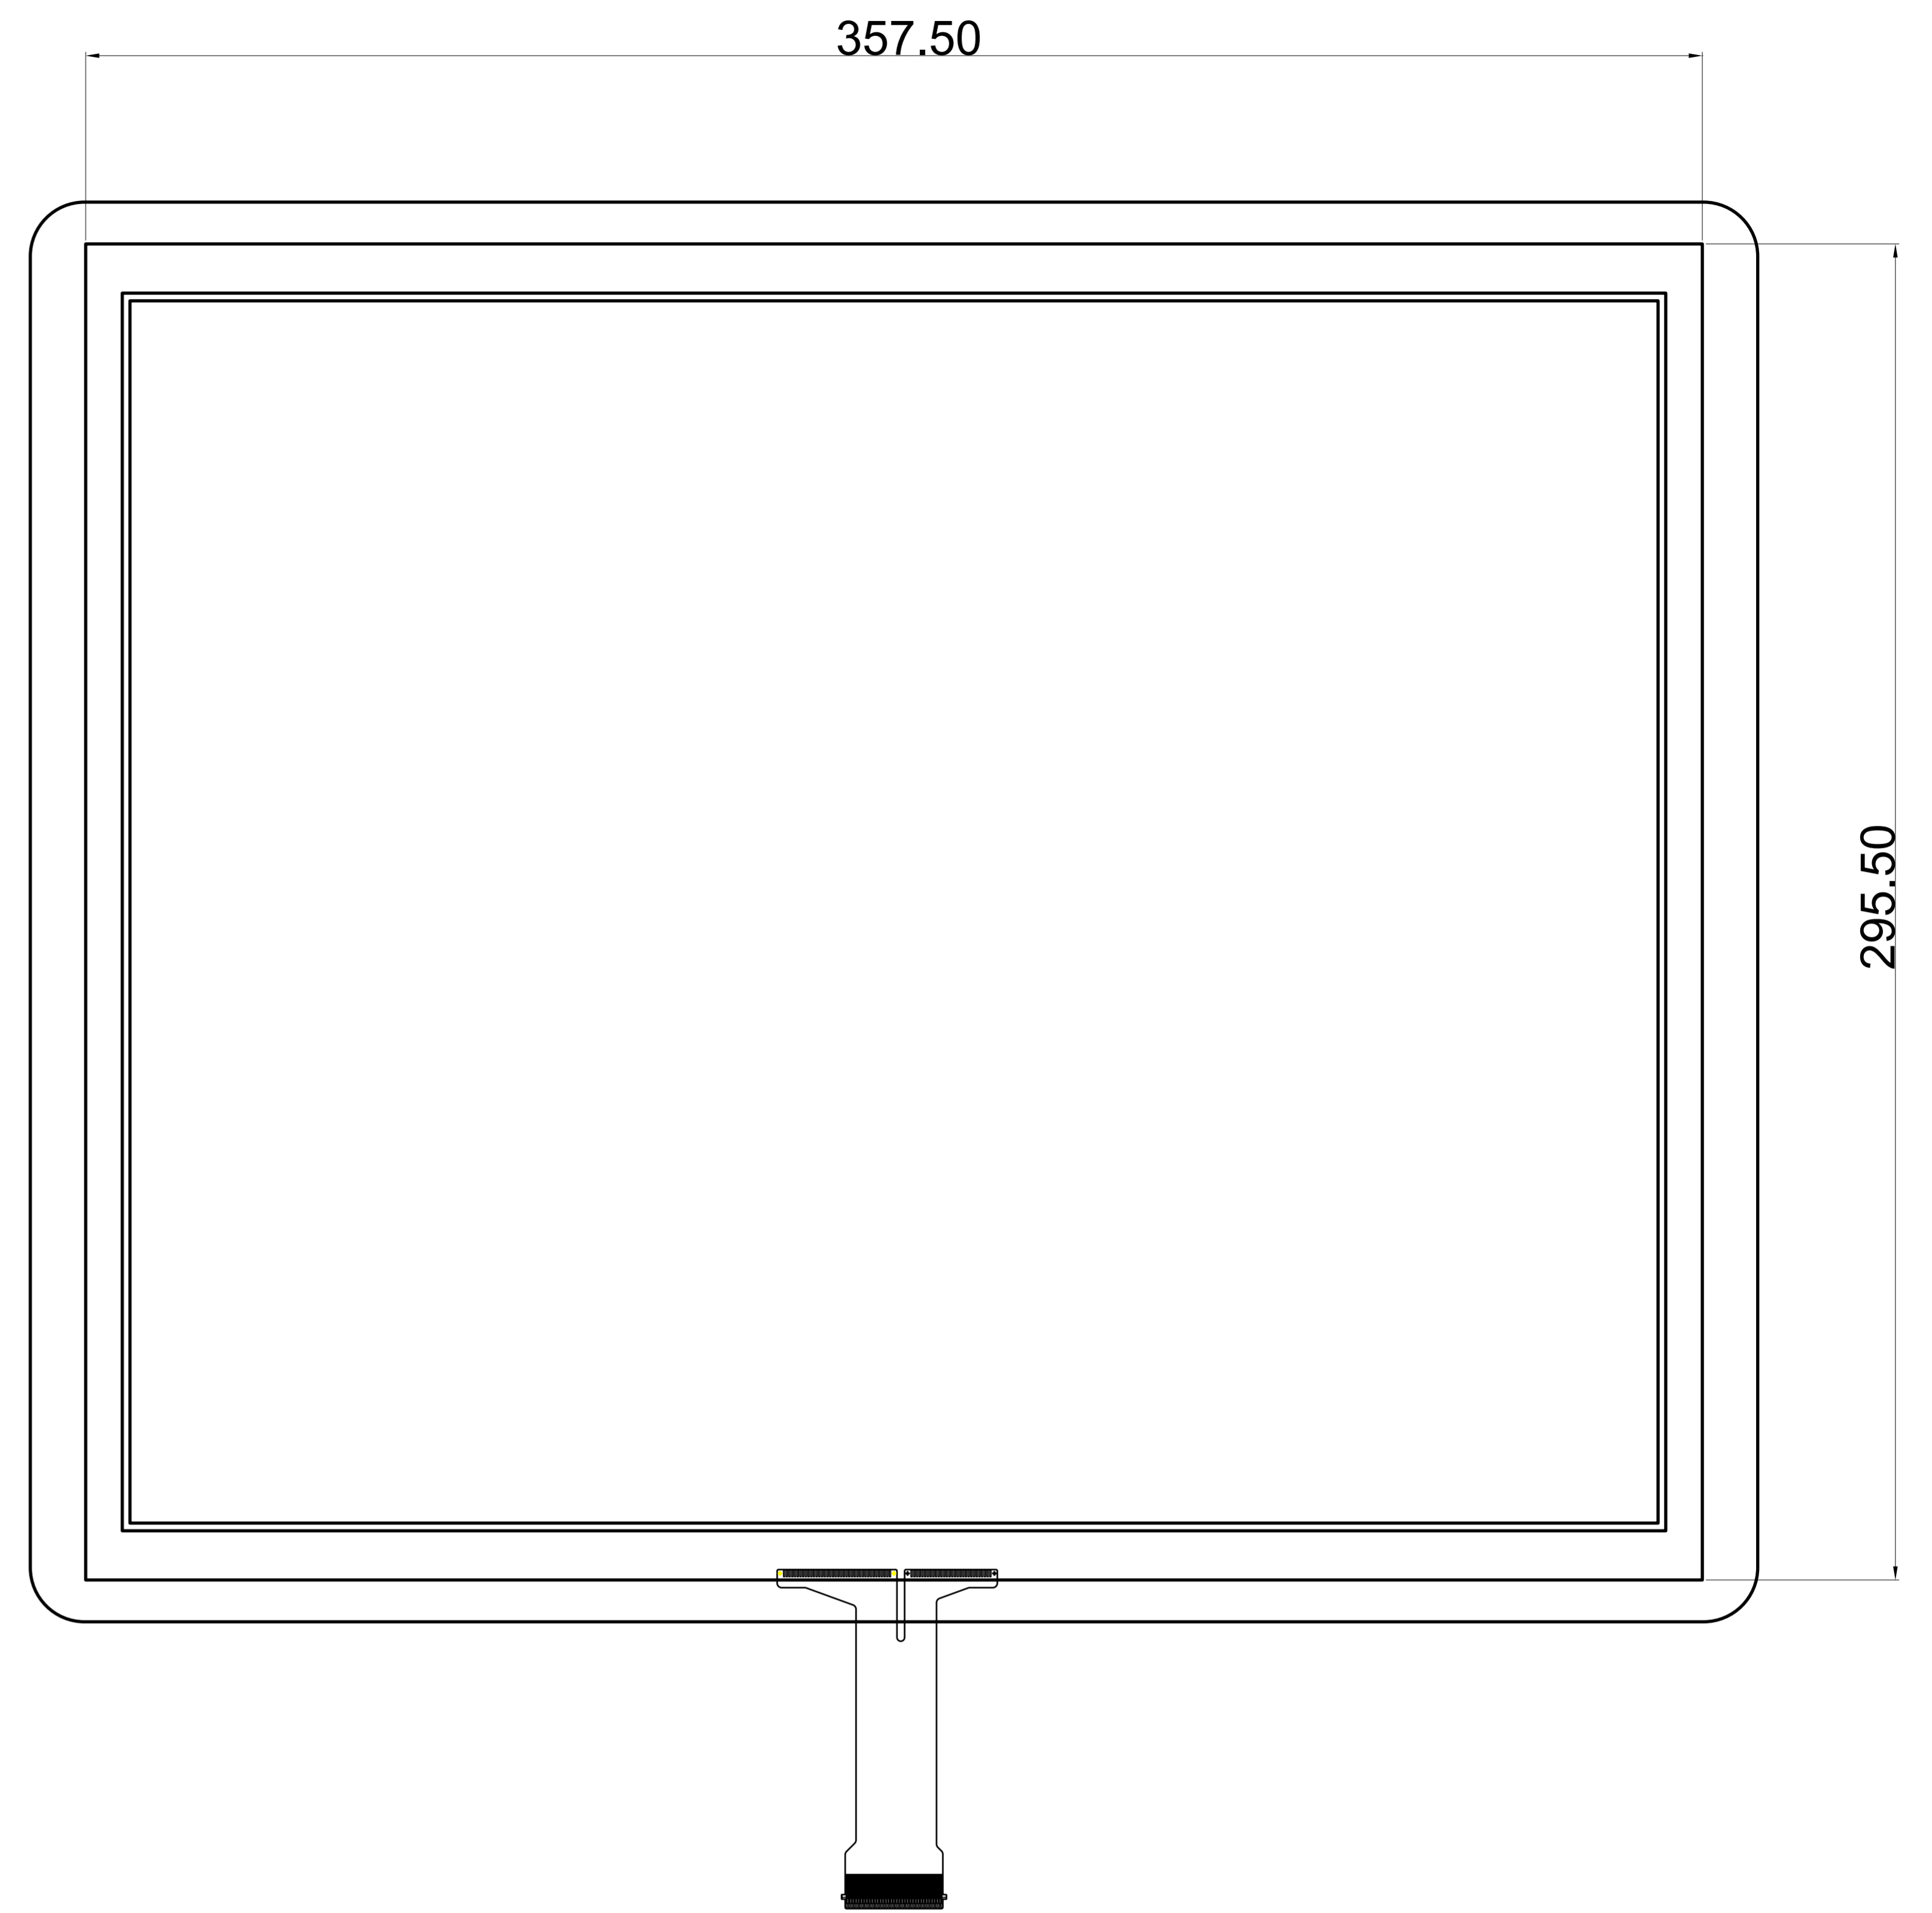

Side


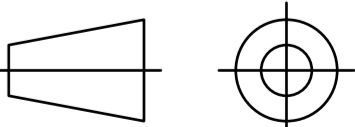


Back

Technical parameters

1. Cover Glass+Loca+ITO Glass+FPC  
ITO Glass: T=0.7±0.05mm  
Cover Glass: T=1.8±0.05mm  
SCA=0.2mm  
Controller: WEIDA Interface: USB+IIC
2. Surface hardness: ≥6H
3. Transmittance: ≥85%
4. Operation voltage: 3.3V
5. Operation temperature: -20°C ~ +70°C, ≤85%RH
6. Storage temperature: -30°C ~ +80°C, ≤85%RH
7. ROHS must be complied
8. Unspecification tolerance are ±0.2mm

USB IFS	
PIN	DFNI
1	VDD/5V
2	D-
3	D+
4	GND

		<b>TOP ONE TECH LIMITED</b>	
DRAWN BY: Wei	Model: TOT170UCA009	VIEW: 	
CHECKED BY: Wei	Part No: TTS170L1C001		
APPROVED BY: Chen	VERSION NUMBER: A	UNITS: mm	SCALE: 1:1
Standard tolerance:	DATE: 05/25/2018		