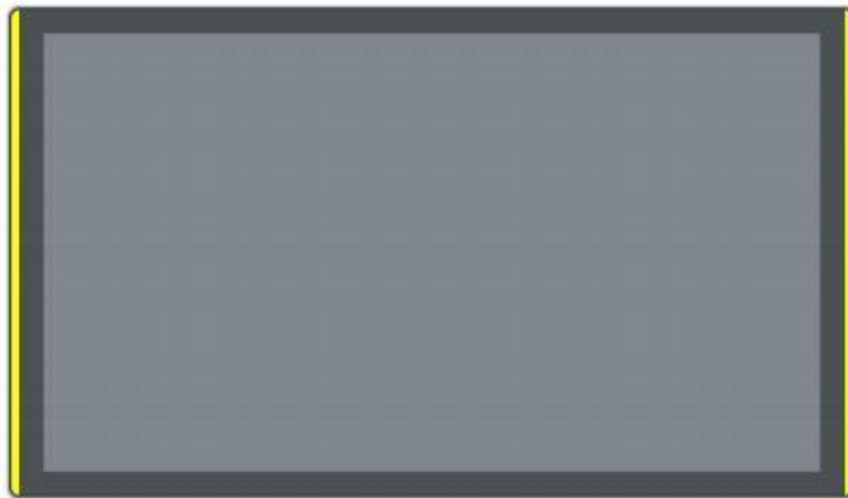

TOP ONE TECH LIMITED
27" LCD Open Frame Touch Monitor
(PCAP and Zero-bezel Type)

Model: TOT270UCA001

Part number:TOT270K1C302-H



Top One Tech's 27" open frame LED touch monitors have along-lasting product cycle because the Enclosure is controlled by Top One Tech's specifications. Future panel improvements are therefore possible Without external changes. The TOT270UCA001 integrate with the Top One Tech's PCAP technology touchscreen.

Features

- 1920x1080 Resolution 16.7M Colors LCD Panel With LED Backlight
- Display Port+DVI+VGA Input Video Source
- DC-12V Input Voltage
- P-CAP 10 Points Touchscreen With USB and RS232 Interface
- Certification CE, FCC, ROHS, etc.
- Fully Supports Aristocrat Helix Plus Gen8

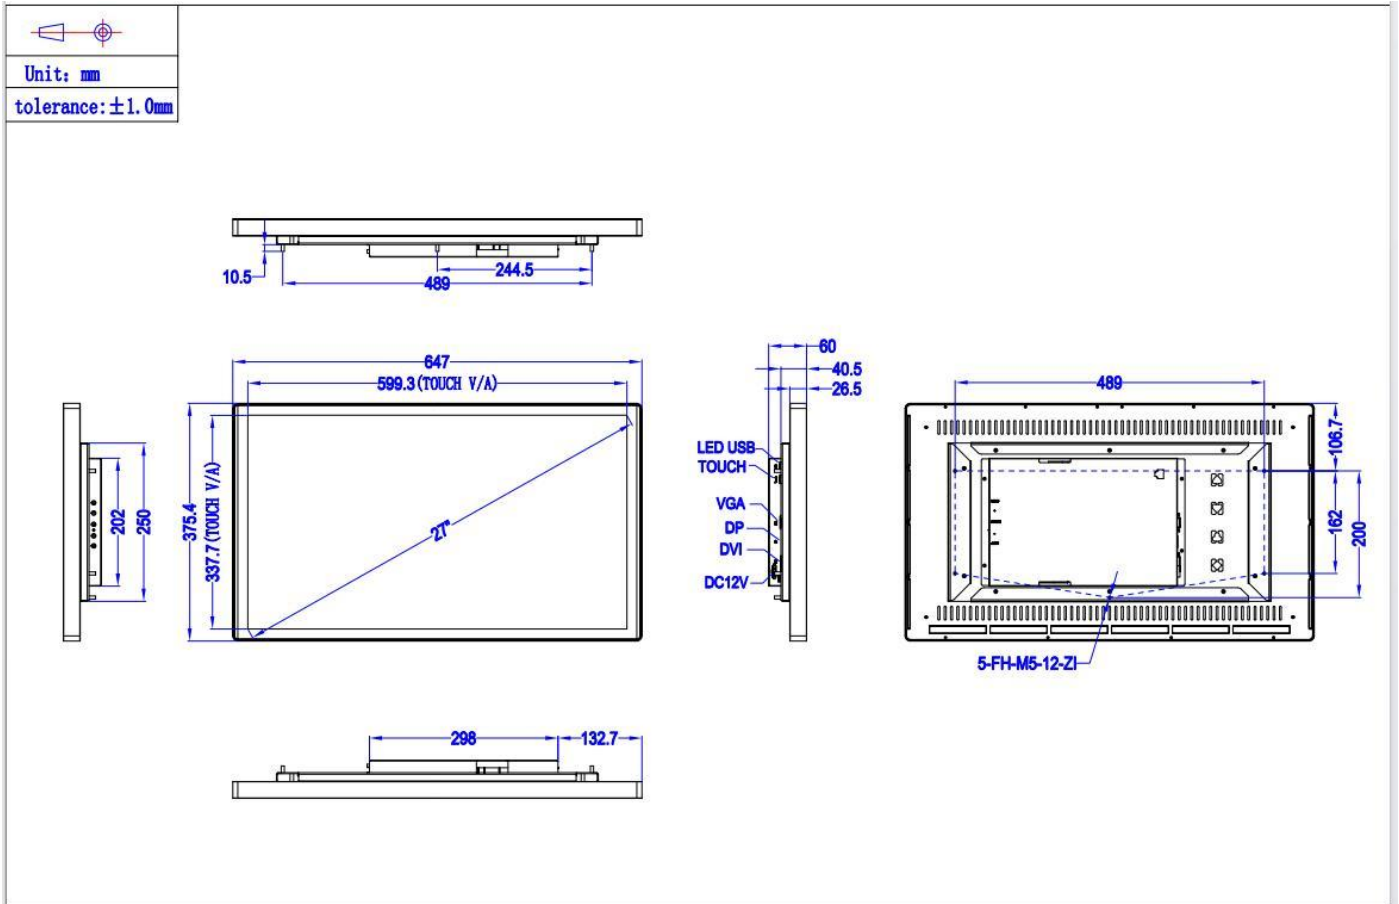
Specification

Model No.	TOT270UCA001	
Series	OT	
LCD Type	16:9 Ratio 27" TFT-LCD	
Display Size	27 " (diagonal)	
Monitor Dimensions(W*H*D)	647*375.4*60(mm)	
Active Area	599.3×337.7(mm)	
Suggested Resolution	1920*1080@60Hz	
Support Colors	16.7M	
Brightness(Typ.)	Pure LCD Pane	300cd/m ²
	With Touch Monitor	255cd/m ²
Response Time(Typ.)	12ms	
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	89°/89°(Typ.)/75°/75°(Min.)
	Vertical(up/down)	89°/89°(Typ.)/75°/75°(Min.)
Contrast Ratio(Typ.)	3000:1	
Video Input	VGA/DVI/DP	
Frequency (H/V)	30~80KHz / 60~75Hz	
Power Supply	Type: External brick	
	Input (line) voltage: 100-240 VAC, 50-60 Hz Output voltage/current: 12 volts at 5 amps max	
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~70°C

	Operating RH:	20%~80%
	Storage RH:	10%~90%
MTBF	≥50,000 Hours	
LCD Back light Life(Typ.)	≥50,000 Hours	
Backlight Unit	LED	
Weight (N.W/G.W)	9.5Kg /23.5Kg(2pcs in one package)	
Out package Dimensions	805*233*553(mm)(2pcs in one package)	
Power Consumption	45W Max.	
Standby power consumption	1.60W	
OSD Control	Buttons	AUTO,RIGHT,LEFT,MENU,POWER
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
Touch screen Type	27"Capacitive touch screen	
Touch System Interface	USB	
Response Time	≤11ms	
Hardness	6H	
Support System	XP, WIN7, WIN8, WIN10, Linux, Android	
Active Area	599.3*337.7(mm)	
Thickness	2.9±0.35(mm)	
Touch Test	≥50,000,000 times	
Certificates	ETL,RoHS	

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model

Mechanical Dimensions



Accessories

Power Cable: A North American power cable or an European power cable is included according to the end user's area.

Power Supply Brick: A power supply brick is included.

Touch/Video/DVI Cables: Detachable serial or USB touch cable, video cable and DVI cable are included

L-brackets: Four standard L-brackets are included (optional by different size).

Typical Application

Gaming/Casino Systems
Outdoor and indoor Kiosks
Entertainment
Transport and Ticketing
Hospitality
Banking
Customized Solutions

How to contact us

TOP ONE TECH LIMITED

Mobile Phone : (+86)13631610695

Tel: 0086-0755-21070641

Whatsapp/Wechat :+8613631610695

Email : sales@toponetech.cn

Skype : elsieyu-sz@hotmail.com

Office in China : Room 2106, Building A, Zhiyun ONE Industrial Park, No. 13 Huaxing Road, Dalang Street, Longhua District, Shenzhen,China

Facilities in China : No. 2,Guihua Jiayi Industrial district,Guanlan, Longhua,Shenzhen, China 518109